

T-63 HCp SINGLE

A COMPACT SOLUTION

T-63 HCp Single is an InPac™ solution offering a high capacity and reliable system for collecting low to medium volumes of non-refillable containers. It is an ideal solution if you have limited space available in your store.

The machine has built-in compaction and accumulation and can be configured to handle non-refillable glass, PET or cans (or a combination of PET/cans). It can be extended with equipment to also accommodate for refillables.



SPACE-EFFICIENT FOOTPRINT

- Easy to place even in the smallest location
- It doesn't occupy valuable selling space

COMBI-COMPACTOR

- One compactor handles up to two fractions
- Allows the minimal footprint
- Can be equipped with Flaker for PET bottles

INTERFACES EQUIPMENT FOR REFILLABLES

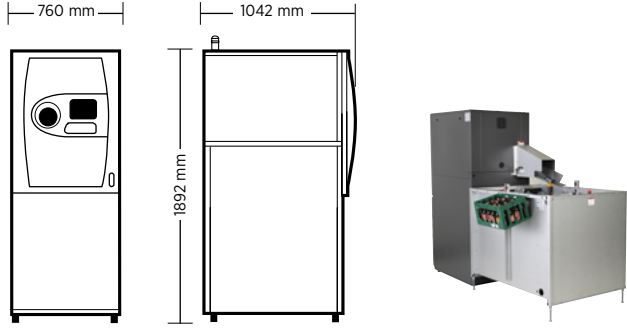
- Can be completed with a solution for refillable containers, PET and/or glass
- Add either a table or a SoftDrop™

CORE RECOGNITION TECHNOLOGY



TOMRA's reverse vending machines are equipped with TOMRA's unique patented recognition technology. T-63 has Sure Return™ container recognition, ensuring correct deposit refunds, the best protection against fraud, and a fast return process for your customers.

T-63 HCP Single

Dimensions		Storage capacity (appr. figures with shakedown)		
 <p>Machine weight: 370 kg (max weight) Footprint: 0.8m²</p> <p>SoftDrop™</p>		PET crusher:	450 bottles (50/50 mix of 0.5l/1.5l)	
		Can crusher:	1500 cans (mix of 0.33/0.5l)	
Based on standard bin size: W: 600, D: 830, H: 850 mm				
Container specifications	Speed capability	Environmental	Electrical	Connectivity
<p>Fractions: Non-refillable PET, can, glass</p> <p>Bottle size Diameter 50-130 mm, Height 85-380 mm</p> <p>Can size Diameter 50-100 mm, Height 80-200 mm</p>	<p>Shape & barcode reading Up to 42 containers per minute</p>	<p>Humidity Maximum 90% relative humidity, non-condensing</p> <p>Temperature +10°C to +40°C</p> <p>The machine has been designed for indoor use only</p>	<p>Power consumption Idle 50W, Max 500W</p> <p>Mains 400 V AC 3-phase w/ground, 50Hz, 16A</p>	<p>LAN (Ethernet TCP/IP) interface</p>

Configurations	Recognition	User interaction	Door colors	Accessories
<p>Freestanding or through-wall, front or rear unload</p> <p>Compatibility: Can be combined with table or SoftDrop™ for refillables</p>	<p>TOMRA Sure Return™ Technology</p> <p>Shape recognition Full container detection</p> <p>Optional Barcode recognition Metal detection Bottle Material Sensor</p>	<p>5,7"LCD color display User guidance in display Sound</p> <p>Includes TOMRAPlus BASE Prepared for TOMRA Value Adding Services</p>	<p>Standard colors: Light grey metallic</p>	<p>Card reader ISDN Electronic receipt (POS)</p>

We reserve the right to make changes to specifications without prior notice. While every effort has been made to ensure all information contained in this document is accurate, TOMRA assumes no liability for any errors, inaccuracies or omissions that may occur.

LEADING THE RESOURCE REVOLUTION

35 billion used beverage containers are captured every year by TOMRA's reverse vending machines. TOMRA's total avoided greenhouse gas emission equals the annual emissions from 2 million cars—each driving 10,000 kilometers.



TOMRA Systems B.V.

Paramariboweg 77

P.O. box 90

NL-7300 AB Apeldoorn

Tel: +31 55 599 8844

Fax: +31 55 599 8880

info@tomra.nl

www.tomra.com